

Test Report

Model: SCT013(100A:50mA)
Qty:10 pcs


Lot NO.: 1605-939

Item	Coil DC resistance	Voltage output at test point	high-voltage insulation test
Test condition	25°C	Primary: Sine wave, F=50Hz Ii=100A R=5.1Ω	AC3500V ,5mA/2s/50HZ Secondary & hole
Dimension	Ω	Vrms	OK
Typical value	106	0.255	No breakdown/flicer
range	±15%	±1%	No breakdown/flicer
1	105.3	0.256	No breakdown/flicer
2	106.2	0.255	No breakdown/flicer
3	108.1	0.254	No breakdown/flicer
4	105.1	0.255	No breakdown/flicer
5	107.4	0.256	No breakdown/flicer
6	106.5	0.257	No breakdown/flicer
7	108.3	0.256	No breakdown/flicer
8	107.5	0.254	No breakdown/flicer
9	105.2	0.255	No breakdown/flicer
10	108.2	0.256	No breakdown/flicer

1.Test Meters: FLUKE 8808A digital multimeter.

2.test qty 10pcs, 10tested data, 100%.

Dimension & Schematic diagram:

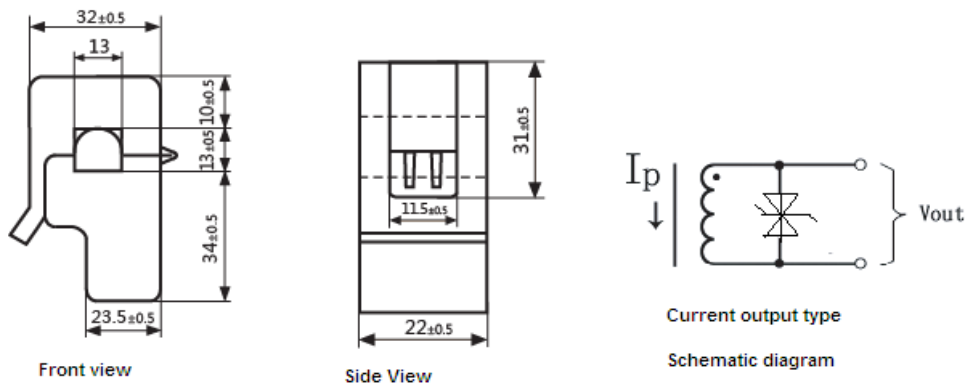

Tested by: WenZeKang

Checked by:

Beijing Yaohuadechang Electronic Co., Ltd

Date: 2016-05-10