

Site: DG-CB12  
Limit: EN 300 220/440 TX ABOVE 1G  
EUT: RFM69C-868  
M/N: RFM69C-868  
Note: 1#

Polarization: **Horizontal**  
Power: AC 230V/50Hz  
Distance: 1m  
Mode: TX

Temperature: 25 (C)  
Humidity: 60 %


### Radiated Emission Measurement

File :TX\_ABOVE

Data :#1

Date: 2017/6/10

Time: 13:41:16

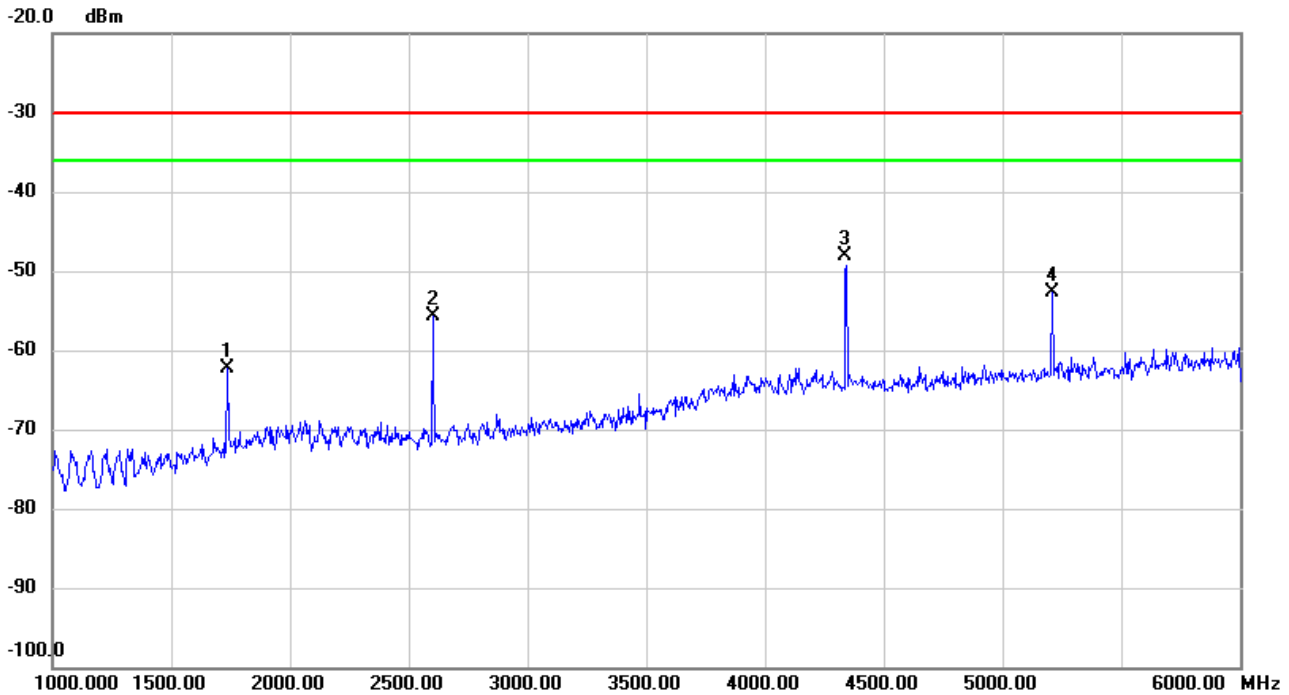

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		1736.167	-57.35	-5.04	-62.39	-30.00	-32.39	peak	
2		2604.333	-52.63	-3.14	-55.77	-30.00	-25.77	peak	
3	*	4339.966	-53.01	4.82	-48.19	-30.00	-18.19	peak	
4		5208.167	-59.50	6.84	-52.66	-30.00	-22.66	peak	

\*:Maximum data    x:Over limit    !:over margin

<Reference Only

Site: DG-CB12  
Limit: EN 300 220/440 TX ABOVE 1G  
EUT: RFM69C-868  
M/N: RFM69C-868  
Note: 1#

Polarization: **Vertical**  
Power: AC 230V/50Hz  
Distance: 1m  
Mode: TX

Temperature: 25 (C)  
Humidity: 60 %


### Radiated Emission Measurement

File :TX\_ABOVE

Data :#2

Date: 2017/6/10

Time: 13:42:59

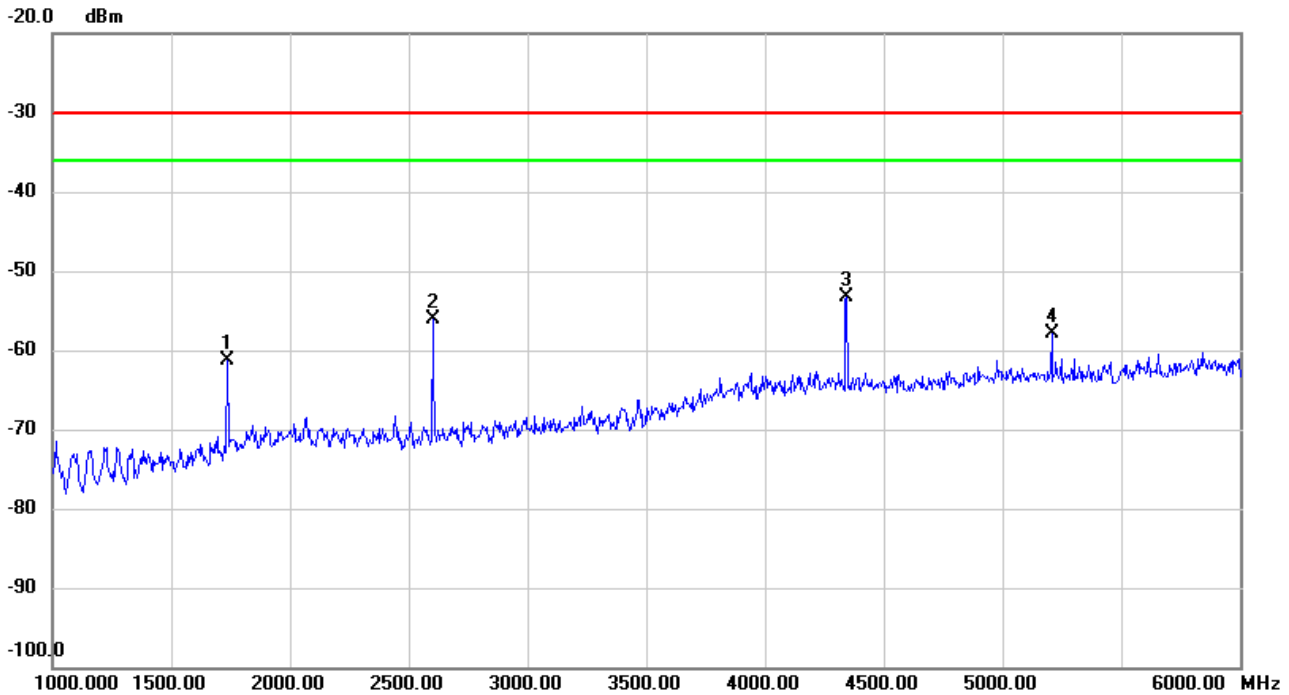

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		1736.167	-56.06	-5.20	-61.26	-30.00	-31.26	peak	
2		2604.167	-53.03	-3.14	-56.17	-30.00	-26.17	peak	
3	*	4340.167	-57.89	4.66	-53.23	-30.00	-23.23	peak	
4		5208.167	-64.51	6.60	-57.91	-30.00	-27.91	peak	

\*:Maximum data    x:Over limit    !:over margin

<Reference Only