


Technical Data Sheet

Tempest Heat Pump Solar

400-500L	32°	0°	32°	42°
200-300L	38°	0°	38°	50°
90-170L	42°	0°	42°	55°

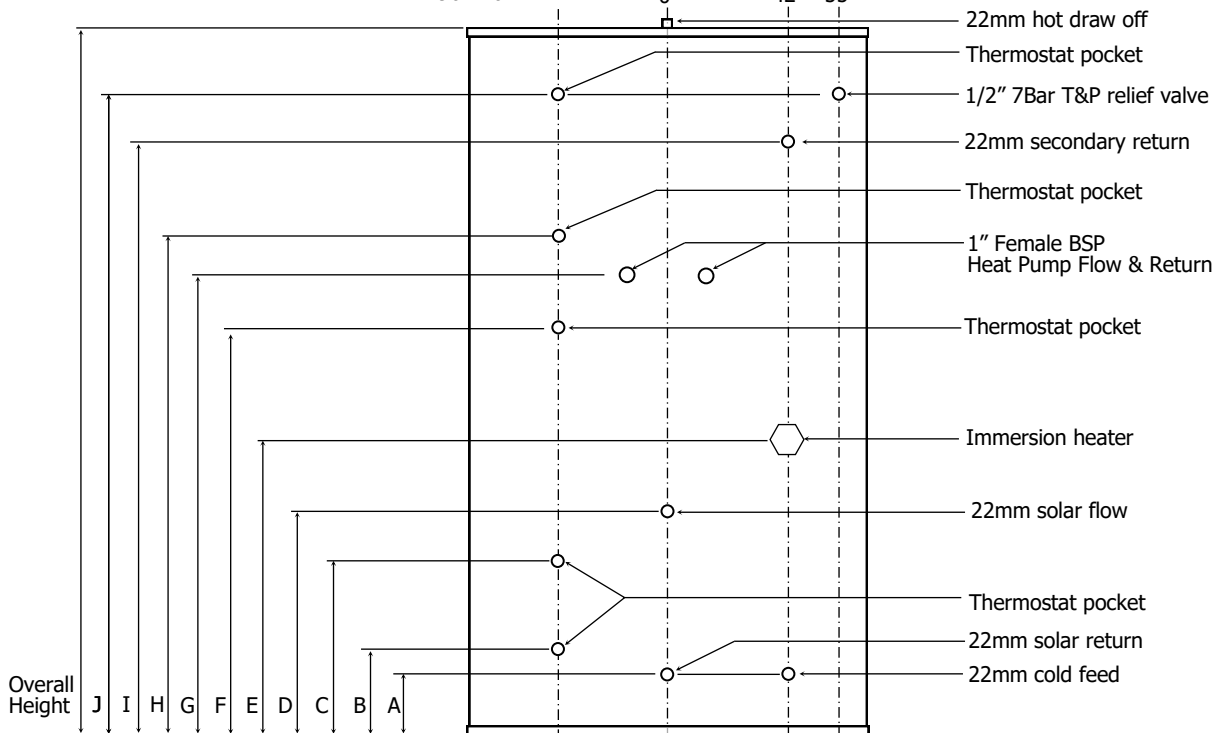

All unvented cylinders come with an unvented component kit to suit.

Capacity (L)	200	250	300
Height (mm)	1500	1800	1650
Diameter (mm)	554	554	580
A (mm)	190	190	190
B (mm)	245	245	245
C (mm)	390	390	390
D (mm)	500	500	500
E (mm)	545	575	570
F (mm)	1045	1075	1070
G (mm)	1345	1375	1370
H (mm)	1395	1425	1420
I (mm)	1223	1485	1312
J (mm)	1323	1635	1461

Capacity (L)	200	250	300
Reheat from cold (minutes)	33	35	40
Reheat from 70% draw-off (minutes)	24	25	29
ERP Band	C	C	C
Immersion Rating (kw)	3	3	3
Standing Heat Loss (kwh/24hrs)	2.04	2.16	2.32



T: 01952 257961
F: 01952 253452

E: sales@telford-group.com
W: www.telford-group.com